



Builders of quality hog products since 1982.

PT Feeder


Patent Pending

FEATURES:

MINIMAL TO NO
ADJUSTMENTS NEEDED
ANTI-CLOGGING
REHYDRATION CENTER
INTEGRATED GRUEL PAN
MAXIMIZE FEED UTILIZATION
EDSTROM NIPPLES
304 STAINLESS STEEL
COMPOSITION
END WEDGES DIRECTS FEED
TOWARD THE PAN
FEED SAVER END CAPS
IMPROVE TRAY MOVEMENT
14 GA TRAY

OPTIONS:

WET/DRY FEED CAPABILITY
DROP TUBE HOLDERS
AVAILABLE IN FAST ALLEY AND
STANDARD MODELS
PAN 1" OFF-FLOOR OR
ON-FLOOR
MULTIPLE PAN DRAIN OPTIONS
AVAILABLE
CUSTOM ANCHOR OPTIONS
VARIETY OF GATE MOUNTING
HOLE PATTERNS
CUSTOM SIZES AVAILABLE
IN STANDARD 35" OR 40"
HEIGHTS

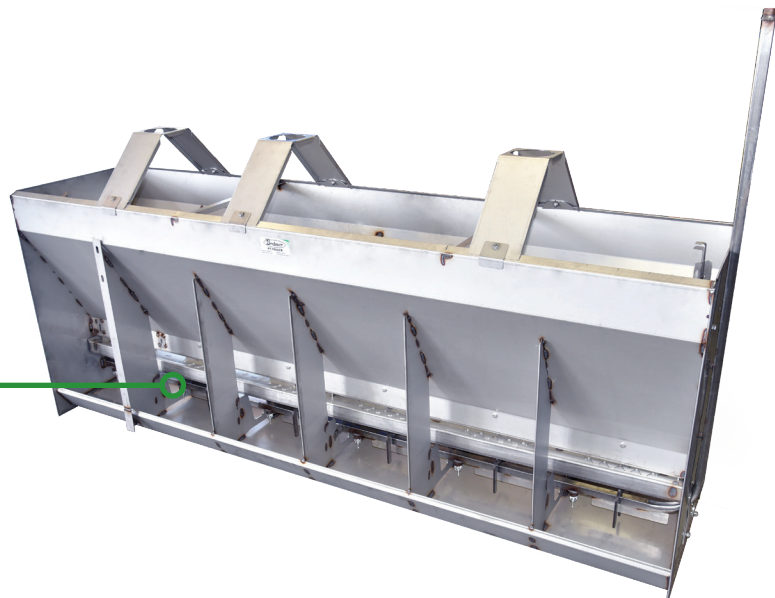

35" PT Feeder	Nipples	Spaces	Length		Width		Height		Feed Capacity	
			Inches	CM	Inches	CM	Inches	CM	Lbs	Kgs
PT28-35	2	4	28	71	20.5	52	35	89	213	96
PT32-35	2	4	32	81	20.5	52	35	89	243	110
PT36-35	3	6	36	91	20.5	52	35	89	273	124
PT42-35	3	6	42	107	20.5	52	35	89	319	145
PT45-35	3	6	45	114	20.5	52	35	89	342	155
PT48-35	3	6	48	122	20.5	52	35	89	365	165
PT50-35	4	8	50	127	20.5	52	35	89	380	172
PT56-35	4	8	56	142	20.5	52	35	89	425	193
PT58-35-FA	4	8	58	147	20.5	52	35	89	441	200
PT60-35	4	8	60	152	20.5	52	35	89	456	207
PT64-35	4	8	64	163	20.5	52	35	89	486	220
PT70-35	5	10	70	178	20.5	52	35	89	532	241
PT72-35-FA	5	10	72	183	20.5	52	35	89	547	248
PT77-35-FA	5	10	77	196	20.5	52	35	89	585	265
PT84-35	5	10	84	213	20.5	52	35	89	638	289
PT90-35	6	12	90	229	20.5	52	35	89	684	310
PT92-35-FA	6	12	92	234	20.5	52	35	89	699	317
PT96-35	6	12	96	244	20.5	52	35	89	729	331

Feed density based on 42 lbs/cubic foot, flush at top.





Builders of quality hog products since 1982.

Paddle Feeder

FEATURES:

FEED CONTROL HANDLE
EDSTROM NIPPLES
304 STAINLESS STEEL
COMPOSITION
HEAVY-DUTY CONSTRUCTION



OPTIONS:

WET/DRY FEED CAPABILITY
DROP TUBE HOLDERS
AVAILABLE IN FAST ALLEY AND
STANDARD MODELS
PAN 1" OFF-FLOOR OR
ON-FLOOR
MULTIPLE PAN DRAIN OPTIONS
AVAILABLE
CUSTOM ANCHOR OPTIONS
VARIETY OF GATE MOUNTING
HOLE PATTERNS
CUSTOM SIZES AVAILABLE
IN STANDARD 36" OR 40"
HEIGHTS

36" Paddle Feeder	Nipples	Spaces	Length		Width		Height		Feed Capacity	
			Inches	CM	Inches	CM	Inches	CM	Lbs	Kgs
P28-36	2	4	28	71	22	56	36	91	172	78
P32-36	2	4	32	81	22	56	36	91	197	89
P36-36	3	6	36	91	22	56	36	91	221	100
P42-36	3	6	42	107	22	56	36	91	258	117
P45-36	3	6	45	114	22	56	36	91	276	125
P48-36	3	6	48	122	22	56	36	91	295	134
P50-36	4	8	50	127	22	56	36	91	307	139
P56-36	4	8	56	142	22	56	36	91	344	156
P58-36-FA	4	8	58	147	22	56	36	91	356	162
P60-36	4	8	60	152	22	56	36	91	369	167
P64-36	4	8	64	163	22	56	36	91	393	178
P70-36	5	10	70	178	22	56	36	91	430	195
P72-36-FA	5	10	72	183	22	56	36	91	442	201
P77-36-FA	5	10	77	196	22	56	36	91	473	215
P84-36	6	12	84	213	22	56	36	91	516	234
P90-36	6	12	90	229	22	56	36	91	553	251
P92-36-FA	6	12	92	234	22	56	36	91	565	256
P96-36	6	12	96	244	22	56	36	91	590	267

Feed density based on 42 lbs/cubic foot, flush at top.





Builders of quality hog products since 1982.

Tray Feeder

FEATURES:

14 GA TRAY

EDSTROM NIPPLES

304 STAINLESS STEEL
COMPOSITION

END WEDGES DIRECTS FEED
TOWARD THE PAN

FEED SAVER END CAPS
IMPROVE TRAY MOVEMENT



OPTIONS:

WET/DRY FEED CAPABILITY

DROP TUBE HOLDERS

AVAILABLE IN FAST ALLEY AND
STANDARD MODELS

PAN 1" OFF-FLOOR OR
ON-FLOOR

CUSTOM ANCHOR OPTIONS

MULTIPLE PAN DRAIN OPTIONS
AVAILABLE

VARIETY OF GATE MOUNTING
HOLE PATTERNS

CUSTOM SIZES AVAILABLE
IN STANDARD 35" OR 40"
HEIGHTS

35" T Feeder	Nipples	Spaces	Length		Width		Height		Feed Capacity	
			Inches	CM	Inches	CM	Inches	CM	Lbs	Kgs
T28-35	2	4	28	71	20.5	52	35	89	213	96
T32-35	2	4	32	81	20.5	52	35	89	243	110
T36-35	3	6	36	91	20.5	52	35	89	273	124
T42-35	3	6	42	107	20.5	52	35	89	319	145
T45-35	3	6	45	114	20.5	52	35	89	342	155
T48-35	3	6	48	122	20.5	52	35	89	365	165
T50-35	4	8	50	127	20.5	52	35	89	380	172
T56-35	4	8	56	142	20.5	52	35	89	425	193
T58-35-FA	4	8	58	147	20.5	52	35	89	441	200
T60-35	4	8	60	152	20.5	52	35	89	456	207
T64-35	4	8	64	163	20.5	52	35	89	486	220
T70-35	5	10	70	178	20.5	52	35	89	532	241
T72-35-FA	5	10	72	183	20.5	52	35	89	547	248
T77-35-FA	5	10	77	196	20.5	52	35	89	585	265
T84-35	6	12	84	213	20.5	52	35	89	638	289
T90-35	6	12	90	229	20.5	52	35	89	684	310
T92-35-FA	6	12	92	234	20.5	52	35	89	699	317
T96-35	6	12	96	244	20.5	52	35	89	729	331

Feed density based on 42 lbs/cubic foot, flush at top.





Builders of quality hog products since 1982.


NIPPLE BAR

FEATURES:

304 STAINLESS STEEL
CONSTRUCTION

EDSTROM PIGLET NIPPLES

E-Z PULL QUICK LATCHES

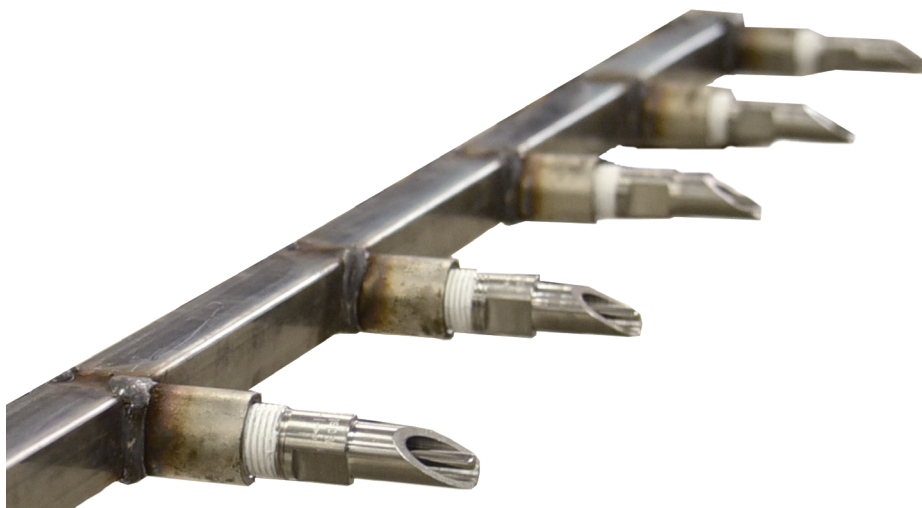

OPTIONS:

DOUBLE OR SINGLE-SIDED
MODELS

CUSTOM LENGTHS



Nipple Bar	Nipples	Spaces	Length		Width		Height	
			Inches	CM	Inches	CM	Inches	CM
D2NB-22-4	4	2	22	56	1	3	30	76
D3NB-32-6	6	3	32	81	1	3	30	76
D4NB-42-8	8	4	42	107	1	3	30	76
D5NB-52-10	10	5	52	132	1	3	30	76
D6NB-62-12	12	6	62	157	1	3	30	76
D7NB-72-14	14	7	72	183	1	3	30	76
D8NB-82-16	16	8	82	208	1	3	30	76

